

2.0MM PIN HEADER SURFACE MOUNT TYPE

MATERIAL

Insulator : Nylon 6T
Contact Pin : Brass





SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩ Min. at DC 500V
Contact Resistance : 20mΩ Max. at DC 100mA
Operation Temperature : -55°C to +105°C

ORDER INFORMATION



1. 1: Plastic Height=1.5mm
 2. 2: Plastic Height=2.0mm
 3. No. of contacts per row
 4. G: Gold flash
T: Tin plated
 5. B: Black Insulator
 6. Other dimensions, please fill out A/B/C
- * Standard dimensions :
PH2MS1 : A=6.2 B=4.0 C=2.2
PH2MS2 : A=6.2 B=4.0 C=2.7

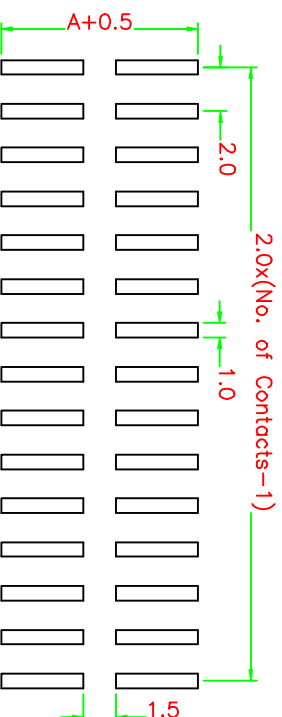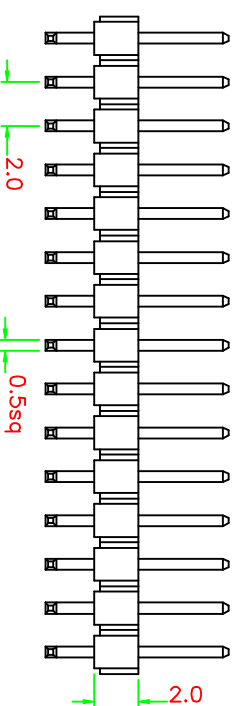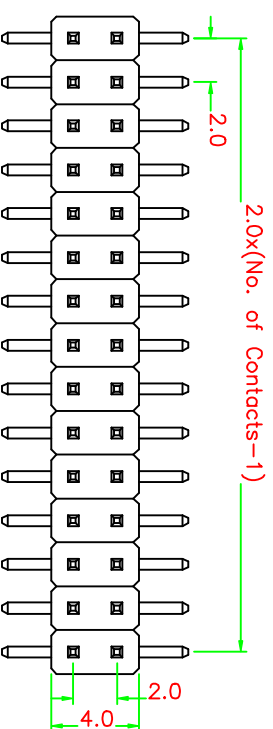

Recommended P.C.B. Layout

UNIT : mm



立河企業有限公司
PINREX ENTERPRISE
CO., LTD

圖名	2.0MM PIN HEADER SMT TYPE		
圖號	PH2MS2-2XXGB		
公差	±0.2	繪圖	Carrie
TOLERANCE		DRAW BY	
比例	3 : 1	日期	011217
SCALE		DATE	