

1.27x1.27mm Pin Header SMT Type


MATERIAL

Insulator : NYLON 6T
 Contact Pin : Brass

SPECIFICATION






Current Rate : 1 AMP
 Insulation Resistance : 5000MΩ Min. at DC 500V
 Contact Resistance : 20mΩ Max. at DC 100mA
 Operation Temperature : -55°C to +105°C

ORDER INFORMATION



1. 1: Plastic Height=1.0mm
 2: Plastic Height=1.5mm
 3: Plastic Height=2.5mm
2. 1: Single row
 2: Dual rows
3. No. of contacts per row
4. G: Gold flash
 T: Tin plated
5. B: Black Insulator

CAP

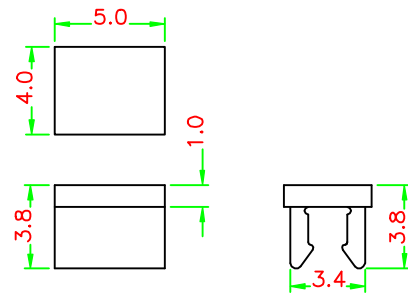

Recommended P.C.B. Layout

UNIT : mm



立河企業有限公司
 PINREX ENTERPRISE
 CO., LTD

圖名 MOLD NAME	PIN HEADER 1.27x1.27mm SMT TYPE		
圖號 DRAWING NO.	CRPH3MS2-205GB55/30/20	比例 SCALE	3 : 1
公差 TOLERANCE	±0.2	繪圖 DRAW BY	Carrie
		日期 DATE	020515