

2.0*2.0 FEMALE HEADER LOW PROFILE 4.3MM STRAIGHT TYPE

MATERIAL

Insulator : NYLON 6T ,UL94V-0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩ Min.

Contact Resistance : 20mΩ Max.





Dielectric voltage : 500V AC for one minute

Operation Temperature : -40°C to +105°C

ORDER INFORMATION

PS2S43-2XXGB
 1 2 3 4

1. 2: Dual rows
2. No. of contacts per row
3. G: Gold flash
4. B: Black Insulator

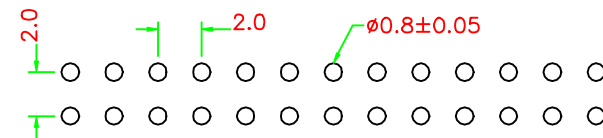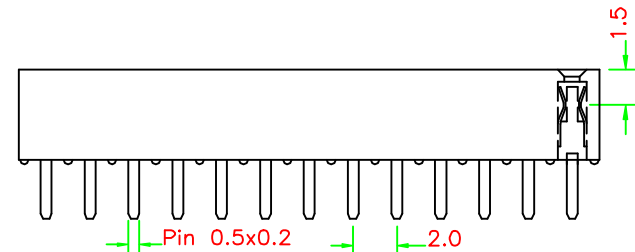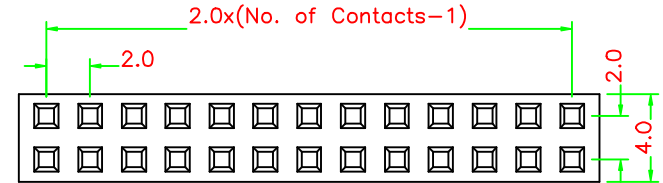

Recommended P.C.B Layout

UNIT : mm



立河企業有限公司
 PINREX ENTERPRISE
 CO., LTD

圖名 MOLD NAME	2.0MM FEMALE HEADER STRAIGHT TYPE		
圖號 DRAWING NO.	PS2S43-2XXGB		比例 SCALE
公差 TOLERANCE	±0.2	繪圖 DRAW BY	日期 DATE
		Carrie	011126