


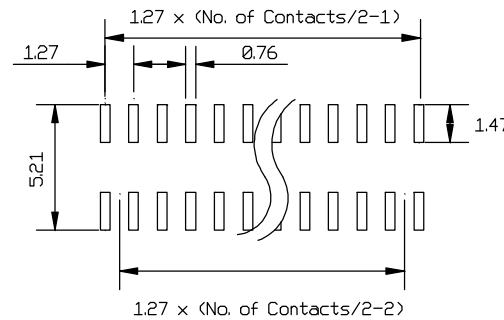
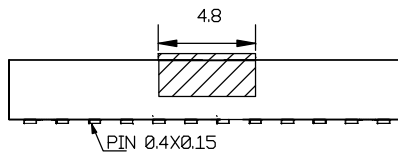


RoHS compliant



## SPECIFICATION

Current Rating : 1.5 AMP  
 Insulation Resistance : 2000 Milliohms Min  
 Contact Resistance: 20m ohms Max  
 Dielectric Withstanding Voltage : 500 VAC, 1min  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 260° for 6 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester , UL 94V-0  
 Standard: LCP

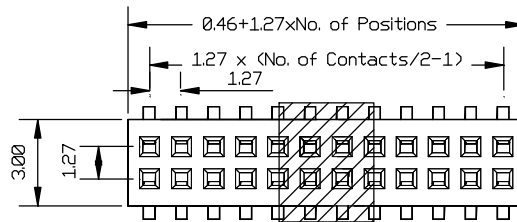

Recommended P.C.Board  
SMD Layout

Ordering Code:

CFS01- 50 - B - A - C  
 ①      ②      ③      ④      ⑤

- ① Series No:
- ② No. of Contact  
50 PIN
- ③ Special Function  
B: Profile 3.6mm
- ④ Contact Plating  
A: Gold flash
- ⑤ Code Packing  
C: Pad+Reel

△					DATE	TOLERANCE UNLESS OTHERWISE SPECIFIED	PRODUCT NO. CFS01-50BAC	WAVE-TECH CO.,LTD.
△				DRAWN			DRAWN NO: CFS01-50BAC-1	
△				CHECKED		TITLE: 1.27MM FEMALE HEADER - 50P		
SYM	NAME	DATE	REVISIONS	APPROVED		Profile: 3.6mm , SMT TYPE		
						ANG. ±5 Ø. ±0.5 .0 ±0.3 .00 ±0.2		