

OP7200 eDisplay

Ethernet-Intelligent Operator Interface

The compact OP7200 eDisplay is an intelligent operator interface ideal for data acquisition and stand-alone systems such as factory floor controls.




Overview

The OP7200 series of intelligent operator interfaces offers rugged I/O and Ethernet connectivity, along with optional A/D and touchscreen capabilities. The 10-Base-T Ethernet facilitates remote diagnostics, control and communication, including sending and receiving emails and alerts. Both models come equipped with a 1/4 VGA display with a 9-key keypad and programmable on/off white LED backlight. The OP7200 series also provides easy-to-use menu building software and offer a programmable audible alarm for prompt notification and keypad/display feedback.

Functionality of the OP7200 can be expanded using the optional RabbitNet™ expansion cards. RabbitNet expansion cards can be tailored to a large variety of demanding applications.

To evaluate and learn more about the OP7200, please visit www.rabbit.com/products/op7200/.

Application Highlight

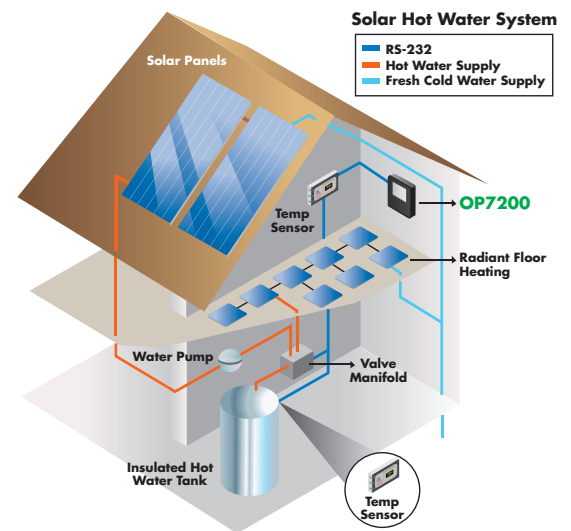

Potential Applications: Industrial real-time control and automation, remote machine control, data acquisition, display dependent applications

Features and Benefits

- Rabbit® 2000 microprocessor at 22 MHz
- 1/4 VGA display (320 x 240 pixels)
- 10Base-T Ethernet, RJ-45
- 256K Flash/128K SRAM
- 24-27 industrialized I/O and 4 CMOS-compatible serial ports
- English and foreign language fonts
- Graphic and bitmap images
- Open source GUI libraries

OP7200 eDisplay Specifications

Feature	OP7200	OP7210
Microprocessor	Rabbit® 2000 at 22 MHz	
Ethernet Port	10/100-compatible with 10Base-T interface, RJ-45	
Flash Memory	256K	
SRAM	128K	
Backup Battery	Socketed 3V lithium coin type, 265 mA-h	
Keypad/Display	¼ VGA (320 × 240 pixels) with programmable white LED backlight, black on white display, transfective FSTN LCD, 6 o'clock viewing angle; 9-key keypad	
Touchscreen	4096 × 4096 resistive touchscreen	None
LEDs	4: Power On, Microprocessor Error, Ethernet Link, Ethernet Activity	
Digital Inputs	19: Protected to ±36V DC	16: Protected to ±36V DC
Digital Outputs	8: Individually configurable in software to sink up to 350 mA each, 36V DC max., or source up to 250 mA each, 40V DC max	
Analog Inputs	8 single-ended or 4 differential, 200 kΩ input impedance, 1.5 ksamples/s sampling rate • Software-controlled ranges: 0-1V, 2V, 5V 10V, 20V DC (11-bit single-ended, 12-bit differential)	None
Connectors	Four 12-position screw-terminal headers, 0.1" pitch	Three 12-position screw-terminal headers, 0.1" pitch
Serial Ports	4 serial ports: • 2 RS-232 or 1 RS-232 (with CTS/RTS) • 1 RS-485 with onboard network termination and bias resistors or 1 RS-422 SPI master port • One 5V CMOS-compatible programming port	
Serial Rate	Max. burst rate = CLK/32, Max. sustained rate = CLK/64	
Real-Time Clock	Yes	
Timers	Five 8-bit timers (4 cascadable from the first), one 10-bit timer with 2 match registers	
Watchdog/Supervisor	Yes	
Power	9-40V DC or 22-26V AC, 4W max.	
Temperature	Operating Range: -10° C to +65° C Storage Range: -30° C to +80° C	
Humidity	20% to 70%, non-condensing	
Unit Size	4.41" × 5.67" × 1.70" (112 mm × 144 mm × 43 mm)	
Pricing		
Price (qty. 1/100)	\$449 / \$422	\$399 / \$375
Part Number	20-101-0535	20-101-0536
Starter Package	\$649	\$599
Part Number	20-101-0535, 101-0543	20-101-0536, 101-0543



Rabbit® 2900 Spafford Street Davis, CA 95618 USA Tel 1.888.411.7228 Tel 530.757.8400 Fax 530.757.8402

91001597
A1/210

Copyright© 2005-2010 Rabbit. All rights reserved. Rabbit is a Digi International brand. Rabbit and RabbitNet are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.